



Distillation unit model M

Treatment of contaminated solvents, concentration of rest-inks, recovery of clean solvent and reduction of waste to be disposed. Polygonal distillation boiler that features and electrically heated double jacket filled with therm al-oil. Designed for batch operation and continuous operation. Residue discharge conveniently through manhole at the front of the unit. Distillation under vacuum to lower boiling point and heating temperature. Automatic shut-off when reaching desired densification. Various options to meet respective task, Ex-proof category 1/2 according to ATEX.


distillation output*:

model M200

» 30-60 l/h

model M400

» 60-100 l/h

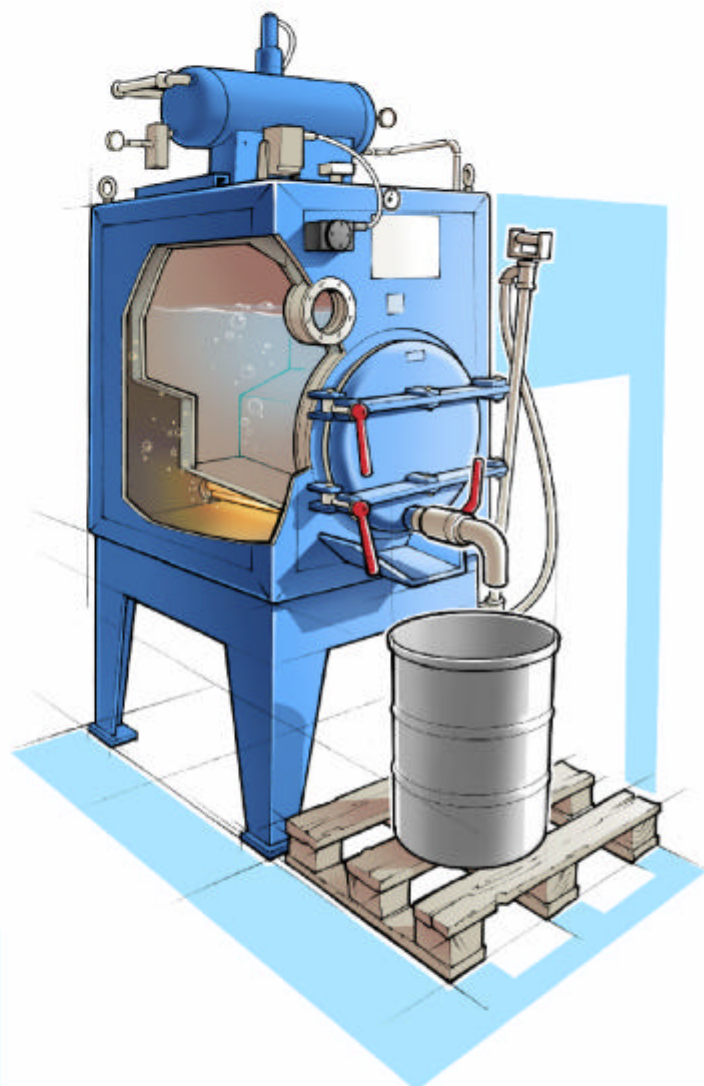

media to be distilled



*(recovery rate varies depending upon type of solvent and solvent contamination.)