


**Second-hand, refurbished, Bieffebi mounter proofer
MIRAGE 336-180 version C**

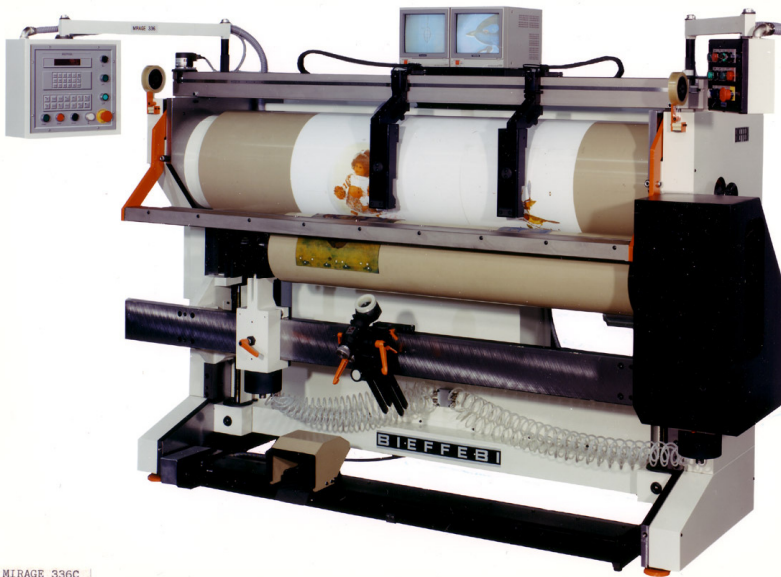

MIRAGE 336C

Please note that the picture enclosed shows the old monitors, while the machine will be equipped with 2 LCD 17" colour monitors.

Printing width	1800mm	(70.86")
Print repeat	300-1240mm	(11.81-48.82")
Maximum weight of the cylinder	650 Kg	
Maximum weight of the air mandrel	200 Kg	

Motor-driven cylinder/air mandrel rotation controlled by treadle or by computer (450W d.c. motor with tachodynamo); the vertical movements of the plate cylinder/mandrel are motor-driven (750W d.c. motor with tachodynamo); the plate cylinder supports, sliding on needle bearings, are provided with air-operated expellers to accept/produce the plate cylinder journals up to the level of the cylinder supports for an easy introduction/extraction of the cylinders.

Camera mounting system consisting in 2 SONY zoom cameras with 3x to 60x magnification and 2 colour 17" LCD monitors.

The positioner QEM (which is provided with a 16-digit, 2-line display) controls the automatic stopping of the plate cylinder in mounting/proofing positions (+ 0,01mm accuracy) according to its printing repeat and to the diameter of its journals, which data will have been keyed into a set-up program; it stores up to 400 cylinder set-up programs, each consisting in printing repeat, diameter of the plate cylinder journals and corrections of the proofing/mounting positions, if any; it displays the movements of the tracing unit, i.e. the requested distances between the vertical layout lines; it programs the repeat divisions in parts either of the same or different extent and controls the drum rotation stopping the drum in the positions (+ 0,02mm accuracy) where to trace the horizontal layout lines; it displays, modifies and stores up to 70 layout programs, each of 40 values.

SMS (Sleeve Mounting System) to cantilever the air mandrel (**not supplied by Bieffebi**) during the sleeve exchange, through a quick change system.

Standard accessories for one printing press: 1 drum gear with custom-made pitch; 1 proofing pressure control gauge; 1 set of spanners; 1 inking roll; 1 copy of the instruction manual in English language.

For single-phase supply only. Air pressure (min 8 bars) must be available.

VERY SPECIAL PRICE EX-WORKS OF USED MIRAGE MOD 336-180CEURO 35.900,00

Packing included. - Transport will be at your care and charge.

Delivery time: Approx. 10-12 working weeks after receipt of the order, drawings and of the deposit.

Payment conditions: 50% down payment, 50% at advice machine ready for crating.

Guarantee from invoice date: 3 months for the electric and electronic components, 3 months for the mechanical parts, only for the defective parts and with **delivery basis EX-WORKS**. The guarantee does not cover the faults due to force majeure or to inexperience of the operator. The guarantee stops if the machines or parts of them have been modified without BIEFFEBI's permission. If the intervention of our engineers is required the travel costs as well as the board and lodging expenses are for your account.

Installation and training: Excluded.

Quote validity: First come, first serve.